

This is a digital document from the collections of the *Wyoming Water Resources Data System (WRDS)* Library.

For additional information about this document and the document conversion process, please contact WRDS at wrds@uwyo.edu and include the phrase **“Digital Documents”** in your subject heading.

To view other documents please visit the WRDS Library online at:
<http://library.wrds.uwyo.edu>

Mailing Address:
Water Resources Data System
University of Wyoming, Dept 3943
1000 E University Avenue
Laramie, WY 82071

Phone: (307) 766-6651

Funding for WRDS and the creation of this electronic document was provided by the Wyoming Water Development Commission
(<http://wwdc.state.wy.us>)

This PDF is intended to represent the document delivered to the Wyoming Water Development Office in hard copy; however variations may exist from the printed version.

WRP FY2021 Project Annual Report

PI: Maohong Fan

Project Title

Recycling co-produced waters (CWs) in the energy industry for economic development

Products

1. Provisional patent:

Maohong Fan and Andrew T. Jacobson: “Multifunctional Titanium Oxyhydroxide – A New Inexpensive, Effective and Environmentally Friendly Candidate for Resolving a Challenging Water Quality Issue: High Alkalinity” has been patented.

2. Publications:

Three journal papers have been published.

Huang, Z. et. al. 2022 “Removal of ions from produced water using Powder River Basin coal”, International Journal of Coal Science and Technology, (just accepted)

Jacobson, A. et. al. 2019 “Evaluation of natural goethite on the removal of arsenate and selenite from water”, Journal of Environmental Sciences, Vol. 76, PP. 133.

Jacobson, A. et. al. 220 “Titanium oxyhydroxide – A new effective candidate for resolving the challenging water quality issue of high alkalinity”, Journal of Environmental Chemical Engineering, Vol. 8. PP 104447.

Information Transfer Activities

The team has been using publication as the major way for the information transfer activities and knowledge dissemination. Three papers have been accepted and published. Also, we planned to attend a water conference. Due to the uncertain characteristics of the time, the plan was canceled.

Student Support

Graduate student: 1

Undergraduate studentw: 2

Notable Achievements and Awards

Project award from US DIA: The results obtained from the project are helpful to the project awarded to the collation team consisting of the members from New Mexico Institute of Mining and Technology and University of Wyoming. The project is focused on removal of contaminants (including organic and inorganic materials) in the waters including produced waters. The total support for the project from the U.S. Department of the Interior is \$350k.

Dr. Jacobson supported by the project has grown into a great water research expert. He can not only independently do water research projects but also successfully write research papers. He has mastered various water research skills including water research instruments. More importantly, he has learned various water and waste water treatment technologies, and will be very valuable to society and development of Wyoming's economy.

Lia Anjani Tan, an undergraduate at UW, trained with the project, is teaching high-school students in Cheyenne of Wyoming. The knowledge she gained from the project are very helpful to the expansion of the STEM knowledge of the K-12 students in the school. She gained a lot of knowledge from the USGS-WWDC project, especially in environmental projection areas. After working on the project, she went to Cheyenne (the capital of Wyoming) to teach high school students. Inspired by the advanced knowledge gained from the project, she has become a PhD student and worked as a teaching assistant in the math department at University of Wyoming.

Dr. Zhaixing Huang was an Associate Scientist trained by the project. He earned his PhD from UW in environmental engineering area. After his graduation, he worked as an Associate Scientist at University of Wyoming. During his working at UW, he not only helped the team made

a significant progress in the protect but also helped the research group in training the graduate and undergraduate students for UW.

The major technical achievements are provided below.

1. Introduction

Global population growth and climate change have made sustainable water supply a challenge to all human beings. Hoekstra estimated that 2 billion people are living in areas with severe water scarcity (Hoekstra 2014). The same author updated the number to 4 billion in a later model (Mekonnen and Hoekstra 2016). Yet "produced water" is produced in large quantities concurrently with oil production, gas production, and other unconventional oil and gas production including coalbed methane and shale oil and gas extraction (Stoll et al. 2015; Veil et al. 2004; Vengosh et al. 2014). The water-to-oil ratio for oil production is about 3:1 (SPE). The oil and gas industries produce about 14.5 billion m³/yr (250 million barrels/day) of produced water, of which 40% is discharged into the environment (Fakhru'l-Razi et al. 2009). Produced water accounts for more than 80% of the liquid waste (Iggunnu and Chen 2014) produced during oil and gas production.

Although a significant potential source of water, produced water contains organic and inorganic compounds. Specifically, dissolved and dispersed oils (BTEX, PAHs, and phenols), grease, heavy metals, radionuclides, treating chemicals, formation solids, salts, dissolved gases, scale products, waxes, microorganisms, and dissolved oxygen are commonly found in produced water. Furthermore, the treatment and disposal of produced water are costly. The expense for treating this potential resource is estimated at \$40 billion per year (SPE) while the disposal cost on a unit basis could be as high as \$4/barrel, depending on the quality of the produced water and the methods that are used (Duraismy et al. 2013).

Nevertheless, due to the need for water and the desire to limit environmental damage due to discharge, treatment of produced water for potable and irrigation uses has become an option (Qi et al. 2021). Conventionally, produced water is disposed by direct discharge or reinjection into disposal wells (Duraismy et al. 2013; Jiménez et al. 2018), thus providing no beneficial use of the water. Physical treatment processes include adsorption, sand filters, hydrocyclones, evaporation, dissolved air precipitation, C-TOUR, freeze-thaw evaporation, devaporation, electrodialysis/electrodialysis reversal, gas flotation, and macro-porous polymer extraction. Chemical treatment processes include chemical precipitation, chemical oxidation, electrochemical processes, photocatalytic treatment, *in situ* chemical oxidation (ISCO), room temperature ionic liquid, and demulsifier (Dickhout et al. 2017; Duraismy et al. 2013; Fakhru'l-Razi et al. 2009; Igunnu and Chen 2014; Li et al. 2010; Munirasu et al. 2016). Membrane filtration, using microfiltration, ultrafiltration, reverse osmosis, nanofiltration, bentonite clay, and zeolite membrane technologies (Dickhout et al. 2017; Munirasu et al. 2016; Nasiri et al. 2017), has been extensively examined with emerging produced water treatment technologies including membrane distillation (Woo et al. 2017), forward osmosis (Bell et al. 2017), and the two combined (Kim et al. 2017). However, membrane fouling and high capital and operations costs remain a big hurdle for these membrane filtration technologies (Duraismy et al. 2013; Stoll et al. 2015). Hackney and Wiesner estimated the cost for treating average quality produced water to remove most of solids, organic, and inorganic components with unit processes to be \$8.06/m³ adjusted to the inflation rate of 2019 (Hackney and Wiesner 1996) and increasing up to \$35.00/m³ for produced water having high concentrations of organic constituents, total suspended solids (TSS), and total dissolved solids (TDS), with TDS removal dominating the cost.

Another fossil fuel, coal, may have potential for cost-effectively treating produced water

from other fossil fuel production processes. Coal accounts for over 88% of the world's fossil fuels (Wang et al. 2019), is widely available and found in about 100 countries all over the world (Andruleit et al. 2016) and is predicted to outlast other hydrocarbon resources by hundreds of years. Furthermore, the conventional uses of coal for power generation, steel making, and chemical feedstock production (Falbe et al. 1982) are becoming less attractive because these uses produce pollutants and emit more CO₂ than any other energy sources (Huang et al. 2017). Coal is now being examined as an inexpensive raw material for manufacturing activated carbon (Rosa et al. 2017), carbon fiber (Li et al. 2017; Liu et al. 2018), silicon metal (WCA), and sorbent (virus removal from water) (Oza and Chaudhuri 1975), for example. Other studies have examined using coal fly ash for synthesizing zeolites (Otal et al. 2005; Querol et al. 2002) or ceramic microfiltration membrane (Jedidi et al. 2009) to be used for produced water treatment. Song et al. reported fabrication of a microfiltration carbon membrane with anthracite to remove oil from oily wastewater (Song et al. 2006). The preparation required carbonization of the coal at an elevated temperature for up to 900 °C. Sulfonated or ammoniated coal was prepared with chemical reactions to add additional functional groups to enhance the ion exchange capacity of coal (Nachod 2012).

These uses require processing of coal in some manner prior to use. Yet coal is a complex material that may have inherent properties suitable for treating produced water directly, without extensive processing of the coal. The objectives of this work were (a) to test the hypothesis that native subbituminous coal from Wyoming's Powder River Basin can effectively treat produced water by removing extremely high concentrations of TDS as well as organic carbon, and suspended solids simultaneously, and (b) to evaluate the ion exchange and sorption mechanisms by which cations and anions are removed. To the best of our knowledge, this is the first work to

investigate the treatment of produced water with native coal directly for simultaneous removal of suspended solids, organic, and inorganic components.

2. Materials and methods

2.1 Coal and Produced Water

Powder River Basin coal from Wyodak was provided by Black Hills Corporation. Coal was milled by Wyoming Analytical Lab (Laramie, WY, USA). The fraction of coal with particle sizes between 40-60 mesh was used for column preparation. The raw coal contained 16.00% moisture, 8.18% ash on a moisture-free basis, and 48.73% volatile matter on a dry and ash-free basis. The elemental composition of the coal was 78.87% C, 3.72% H, 1.01% N, and 15.93% O on a dry and ash-free basis (Liu et al. 2018). The pore properties of the coal were BET specific surface area (N₂ at 77 K) 2.598 m²/g, DFT pore diameter 0.844 nm, average pore diameter 13.64 nm, and total pore volume 0.018 cm³/g (Xu et al. 2020; Zhang et al. 2021).

The petroleum produced water was provided by Hunt Oil Co. (Knox City, TX, USA). It was collected on February 22, 2018 from the feed before entering the wastewater treatment plant. Key parameters of the produced water included: pH 6.83, TSS 233 mg/L, TDS 152,320 mg/L, conductivity 238 mS/cm, total organic carbon (TOC) 42 mg/L, and alkalinity 80 mg/L.

2.2 Experimental Design and Operation

All experiments were conducted by passing produced water through a column packed with coal. A 500-mm long, 25-mm ID Kontes chromatography column equipped with a PTFE stopcock plug (Kimble Chase, Rockwood, TN, USA) was packed with ground coal (30 g). A pinch of cotton was used as a strainer right before the stopcock plug to strain the coal particles. The coal was washed with 100-mL of deionized (DI) water that was passed through the packed coal by gravity. The final height of packed coal was approximately 65 mm.

Filtration experiments were conducted to examine the removal of suspended solids, organic, and inorganic compounds from produced water. An aliquot of 30 mL produced water was filtered (by gravity unless otherwise stated) through the column packed with coal. The filtrate was collected and designated as the sample to be analyzed for that cycle. Then the column was washed with 30 mL of 1% HCl (wt/vol, 37% TraceMetal Grade, Fisher Scientific, Pittsburgh, PA, USA), followed by a DI water rinse until the pH of the wash was circumneutral. After washing, another 30-mL aliquot of produced water was filtered through the same coal column. This filtration-washing cycle was repeated 10 times.

To investigate the impact of functional groups on the water treatment, the coal was extracted with solvents including NMP (N-Methyl-2-pyrrolidone), (THF Tetrahydrofuran), and methanol before being placed in the column. The ground coal was soaked in solvent at a ratio of 1 to 3 (coal wt/solvent wt) at ambient temperature for one week. The coal-solvent mixture was then filtered through a filter paper (Whatman qualitative, Grade 1, GE, Pittsburg, PA) and the coal was washed with that solvent until the filtrate contained no color. The coal was recovered and dried at 80 °C. The dried, extracted coal was then used in the filtration apparatus as described for the sequential filtration experiments.

2.3 Analytical Measurements

Conductivity, TDS and pH were measured by an H280G pH, conductivity and DO meter (Hach, Longmont, CO, USA). The alkalinity measurement was done with an alkalinity test kit AL-AP MG-L (Hach, Longmont, CO, USA). TOC was measured for both raw and treated produced water. TOC was analyzed with a Shimadzu TOC analyzer (TOC V CSN, Shimadzu Corporation, Kyoto, Japan). The original water sample was also analyzed with a Varian Cary Eclipse Fluorescence Spectrophotometer (Agilent, Walnut Creek, California, USA) for 3D-EEM under

emission 3D mode. The scanning setup is as follows: emission wavelengths (Em) 290-590 nm with 2 nm increments; excitation wavelengths (Ex) 225-450 nm with 2.5 nm increments, slit bandwidths 5 nm for both emission and excitation; and scan rate 1200 nm/min (Wang et al. 2019). The spectra were processed using MatLab (Natick, Massachusetts, USA).

The concentrations of major inorganic elements, including Ca, Cl, Fe, K, Mg, and Na of the raw and treated produced water were determined by a Perkin Elmer NexIon 300 ICP/MS (Waltham, MA, USA) under standard mode (Huang et al. 2020; Lewińska-Preis et al. 2021). The certified ICP/MS standards were purchased from Inorganic Ventures (Christiansburg, VA, USA). A Re solution (50 ppb) was used as the internal standard. The water samples were diluted to meet the requirements of the device prior to analysis.

The untreated and solvent-extracted coal were characterized by a Fourier transform infrared (FTIR) spectrometer (Nicolet iS50, Thermo Scientific, USA). The attenuated total reflectance (ATR) technique was used to acquire data without complicated sample preparations. The samples were scanned between 4000 and 400 cm^{-1} at a resolution of 4 cm^{-1} . The data of each spectrum were collected with 128 scans. Coal samples after filtration and after acid wash were studied using a Scanning Electron Microscopy with Energy Dispersive X-Ray Spectroscopy (SEM-EDS, Model #51-XX0005, FEI, Quanta FEG MK2; Oxford Instruments America, USA) to examine the adsorption of the inorganic ions. The coal samples were dried at 80 °C, spread evenly on a double-sided carbon tape which was then mounted on an SEM stub. The scanning was operated in HV mode with an accelerating voltage of 20 kV. Magic angle spinning nuclear magnetic resonance (MAS-NMR) data were acquired on a Bruker Avance III 600 NMR spectrometer, operating at Larmor frequencies of 600.2 MHz (^1H), 150.9 MHz (^{13}C). A 5.0 mm triple resonance (^1H , ^{13}C , ^{15}N) E-free CPMAS Bio-solids probe was used. The temperature was

held constant at 25.0 Degree Celsius and the spinning rate was 8000 Hz. Calibration was done using KBr and adamantane. About 30 mg of each sample was measured within 4 mm ZrO₂ rotors. ¹³C-NMR spectra were acquired using cross-polarization (CP), spectral width = 552.1 ppm, contact time = 2000 μs, ramp. 100 and tppm13 for ¹H, recycle delay = 2 s, 40960 scans.

3. Results and discussion

3.1 Removal of Inorganic Ions, TOC and TSS

The primary inorganic components of the untreated produced water include cations: Na (49.2 g/L), Ca (10.0 g/L), Mg (1.70 g/L), K (0.31 g/L), and Fe (0.56 g/L), and an anion: Cl (90.8 g/L). Na and Cl comprised about 92% by weight of the total inorganic ions determined by ICP-MS. These inorganic ions were effectively removed by filtration through the coal column (**Fig. 1, Supplementary Table 1**). Ten filtration-regeneration cycles were conducted and showed 60% to 80% removal of individual ions with an average removal of 73%. Interestingly, the percent overall removal of all ions was similar, ranging between 64% and 76%, suggesting there was no specific removal selectivity of these ions. An average of about 0.12 g of TDS was removed per g coal for each filtration-regeneration cycle, although there is residual water in the pores of the packed column after washing. There may be dilution effects from the residual water that need further investigation.

Other minerals like bentonite clay and zeolite were also investigated for treating produced water. Bentonite was used as a pretreatment measure and exhibited enhancement of membrane performance in treating produced water (Kusworo et al. 2018; Shahrudin et al. 2015). However, in another study, membrane prepared from bentonite was found to be not effective to treat produced water with high TDS (Li et al. 2003). Zeolite was used to manufacture ion exchange resin/sorbent to remove cations and anions present in water (Jiménez et al. 2018). Studies showed

that natural or modified zeolite was able to remove hardness and sodium in produced water (Belbase et al. 2013; Zhao et al. 2008; Zhao et al. 2009). However, major applications of zeolite in produced water treatment focus on the removal of organic components such as benzene, toluene, ethylbenzene, and xylenes (BTEX) compounds (Ranck et al. 2005).

The TOC concentration of the original produced water was 42 mg/L. During filtration through the coal column, 71% to 92% of the TOC was removed. The removal efficiency of the initial cycle (Cycle-1) was the lowest (71%), whereas the mean value of the remaining 9 cycles was 90%. The removal capacity of organic components was significantly improved after coal regenerations. However, a pretreatment may be needed to remove dispersed and/or dissolved oil if the concentration is high, because an oil film can be formed and reduce the effective sites for ion removal. The TSS was decreased from 233 mg/L in the raw produced water to a negligible level (below detection) in the filtrate.

Fig. 2 shows SEM and EDS images of the coal samples directly after filtration and also after regeneration with the acid wash. The EDS analysis (**Fig. 2b**) clearly shows adsorption/deposition of major inorganic ions on the surface of coal particles. After regeneration with the acid wash, most of the cations were removed (**Fig. 2d**), thus confirming how the treatment cycles worked. Ions were retained in the coal through filtration and subsequently removed by acid wash, thereby regenerating the coal medium for further filtration cycles. After regeneration with the acid wash, Cl dominated the surface of coal (**Fig. 2d**) because diluted HCl solution was used as the washing agent.

3.2 Results of ^{13}C NMR analysis

The raw coal, washed coal before filtration (Before filtration), and coal after filtration (After filtration) were subjected to NMR analysis to identify functional groups and investigate the

changes of these functional groups. The coal spectra in **Fig. 3** are typical (Xu et al. 2018). Many oxygen-containing functional groups, including alcohol, carboxyl, carbonyl, phenol, ester, and ether were identified in all samples with different intensity (Kim et al. 2013). Other non-oxygen-containing functional groups including aliphatic and aromatic C-H groups such as methyl, methylene, and methyne were also identified. This is in line with other studies suggesting low rank coal contains hydroxyl-, methoxy-, and/or methyl-substituted benzene rings, carboxylic acids, and aliphatic linkers line $-\text{CH}_2\text{CH}_2-$ group (Liu et al. 2013; Liu et al. 2019). The coal sample after filtration has reduced intensities for most functional groups as compared to the ‘before filtration’ coal sample, including ketones, quinines, aldehydes, aromatics, methylene and methyl carbons.

3.3 Effects of solvent extraction on coal and solvents

To investigate the mechanisms of ion removal by coal filtration, PRB coal was solvent-extracted with tetrahydrofuran (THF), methanol, or N-methyl-2-pyrrolidone (NMP). The total ion removal capacity of the coal (as determined from a filtration cycle without subsequent acid washing) was significantly decreased by solvent extraction, to 26%, 23%, and 16% removal for THF, methanol, and NMP extractions, respectively.

Solid coal, both before and after extraction, and liquid solvent after extraction were examined by FTIR analysis. Although there are difficulties in using FTIR to analyze heterogeneous materials like coal with respect to sample preparation, band assignments, and baseline correction (Solomon and Carangelo 1982), a number of functional groups and changes due to solvent extraction were identified in this study. **Fig. 4** shows the FTIR spectra of coal and liquid from solvent extraction. The peaks were identified according to the literature (Sigma-Aldrich ; Xie 2015). The coal structure was modified by solvent extraction to different extents (**Fig. 4a**). Specifically, coal extracted with NMP exhibited the greatest structural changes with

respect to functional groups, followed by methanol and THF. This is consistent with the ion removal capacity where NMP extraction showed the greatest decrease in capacity, followed by methanol and then THF which showed the smallest decrease in ion removal capacity.

The liquid solvents after extraction contained compounds with oxygen- and nitrogen-containing functional groups (**Fig. 4b**), consistent with the changes in the solid coal functional groups. The intensity of N-H stretching for solvent-extracted coal was significantly reduced, whereas peaks of N-H stretching existed in all the liquid extracts. The intensity of the N-H peaks of the coal followed the same tendency of ion removal capacity, with less ion removal capacity corresponding to decreased intensity of the N-H peaks. This was also true for other functional groups such as carboxyl and phenolic-hydroxyl groups, suggesting that these functional groups may be involved in ion removal. These results are most evident in the NMP treatment where the intensity of these peaks in the extracted coal were significantly reduced while the NMP after extraction had a strong presence of these peaks. NMP has been shown to facilitate the extraction of hydroxyl-containing moieties from bituminous coal (Sun et al. 2014). These results indicate that the extraction of these functional groups significantly impaired the ion removal capacity of the coal, largely related the removal capacity to the number of these oxygen- and nitrogen-containing moieties.

3.4 Composition of coal extracts

Volatile and small-molecular compounds in the extracts were characterized by GC/MS to investigate the impact of extractable components on the ion removal. As shown in **Fig. 5**, the group components detected in the extracts mainly included alkanes, alkenes, arenes, alcohols, phenols, ketones, carboxylic acids, and esters. The relative abundances of oxygen-containing compounds (i.e., alcohols, phenols, ketones, carboxylic acids, and esters) compared to all extracted compounds

were 47.2%, 86.4%, and 82.0% for THF, methanol, and NMP extracts, respectively. Oxygen-containing functional groups, especially carboxyl and hydroxyl, in these compounds may interact with metal cations to form cation-bridging linkages (Liu et al. 2016; Mathews and Chaffee 2012), which are beneficial for ion removal. Extraction of these oxygen-containing compounds appears to have significantly reduced the ion removal capacity of the coal.

The detected compounds in the methanol and NMP extracts were dominated by esters with 76.6% and 52.9% relative abundance, respectively (**Fig. 5**), while the hydroxyl-containing compounds (like carboxylic acids, alcohols, and phenols) had a relatively low abundance. As polar solvents, methanol and NMP have proven to be effective for extracting hydroxyl-containing compounds from coals (Liu et al. 2016; Sun et al. 2014). Because GC/MS is only sensitive for volatile and less polar compounds, the GC/MS detectable compounds account for only a fraction of the compounds in the extracts. According to FTIR analysis, NMP extract may also contain many hydroxyl-containing compounds, especially carboxylic acids with low carbon numbers, which were not detected by GC/MS.

4. Proposed mechanisms of ion removal

The structure of a coal macromolecule may be visualized as a condensed aromatic carbon-atom lattice surrounded by a typical “fringe” formed by functional side groups. The left panel of **Fig. 6** is a hypothetical model of coal structure (Malumbazo 2011). It is a heterogeneous mixture composed of a macromolecule network with varying degrees of cross-linking (Smith et al. 2013). Modified lignin, as well as cellulose and melanoidin-type materials, are considered to be the ‘backbone’ of this macromolecule network. The cross-linkage of lower rank coal, including subbituminous coal, is dominated by alkyl and aryl ether groups with oxygen functional groups. The chemical heterogeneity of coal decreases from low rank coal to high rank while the

aromaticity increases, suggesting that lower rank coals (lignite and subbituminous) have more complex chemical structures than high-rank coals (bituminous coal and anthracite) because the low rank coal contains several distinct classes of constituents (Hofrichter and Fakoussa 2001; Wang et al. 2015). Carboxyl and hydroxyl groups, among others, are the main oxygen-containing functional groups in coal structure which are present in low-rank coal (Xie 2015). Phenolic hydroxyl groups are the main form, but some alcoholic hydroxyl groups also exist.

The removal of cations from produced water by coal filtration is proposed to be through ion exchange (**Fig. 6a**). The carboxyl and hydroxyl groups may act as ion exchanger sites by exchanging protons (H^+) for other cations (Na^+ , K^+ , Ca^{2+} , Mg^{2+} , etc.) allowing these cations to bind to the negatively charged hydroxyl and carboxyl functional groups. This hypothesis is supported by the pH measurements of the raw produced water before filtration (6.83) and the water after filtration (as low as 2.28), indicating that protons were released by the coal, presumably due to cation exchange. Additionally, NMR analysis of before and after filtration coal samples also showed significant intensity reduction of carboxyl and hydroxyl groups, further supporting the cation exchange hypothesis. The solvent extraction results provide additional support for the hypothesis. Solvent extraction removed carboxyl and hydroxyl functional groups, as illustrated by the FTIR analyses where the functional groups were removed from the coal and present in the extracts, resulting in significantly impaired ion removal capacity.

Proposed mechanisms for Cl^- removal are less clear. One possible removal mechanism is adsorption of Cl^- due to the delocalization of electrons within molecules to form resonance structures (**Fig. 6b**). This resonance effect or mesomeric effect or electron-donating effect occurs between a lone pair of electrons and a pi bond or two pi bonds next to each other (Dewick 2006). For example, the lone electron pair in the oxygen of the phenolic hydroxyl group may be donated

to form a double bond and leaving a positive charge. The donation stabilizes the structure of the non-ionized acid such as phenols or derivatives. The donating effect passes the electrons on to the pi bonds along the ring to produce a negative charge of the para- or ortho-carbon in the same aryl ring. These charged molecules could then bond with both negative and positive ions in the produced water to remove them. The resonance effect could be positive or negative. In the positive resonance effect, -OH, -SH, -OR, and -SR can increase the electron density of the stabilizing ring while -NO₂, -S=O, and -C=O could decrease the electron density of the stabilizing ring in the negative resonance effect (Dewick 2006). The removal of these functional groups, as occurred with solvent extraction, would reduce the ion removal capacity of coal.

Alternatively, the ion removal of any particular ion may not be attributed to any single functional group. Other possible mechanisms to produce charges in coal include changes of electron density by binding alkali metal ions (which are dominant species in produced water) with the functional groups in aromatic structures and electrostatic induction (Xie 2015). In recent decades, ion- π interactions have been recognized and found to be widely exist as a form of general noncovalent bonding (Dougherty 1996; Ma and Dougherty 1997; Schottel et al. 2008). Ion- π interactions happen not only in aromatic systems, but are also well documented in other simple π systems such as ethylene and acetylene. Studies show that highly solvated cations can be sequestered by such binding force in aromatic-containing structures (Ma and Dougherty 1997), while anion- π interactions happen in electron deficient aromatic systems (Schottel et al. 2008). The anion- π interaction combines effects of electrostatic and anion-induced polarization, with the former correlated to permanent quadrupole moment, Q_{zz} and the latter to molecular polarizability (Quiñonero et al. 2004; Schottel et al. 2008). Aromatic molecules with lower absolute values of Q_{zz} could bind to both anion and cation which might account for some of the ion removal in our

system (Schottel et al. 2008). The ion- π interaction binding energy is estimated to be 20-50 kJ/mol which is energetically favorable and is comparable to the binding energy of hydrogen bonds. In the ion- π theory, the inductive effect, rather than the resonance effect, facilitates binding (Ma and Dougherty 1997; Schottel et al. 2008). Although the mechanisms of anion removal remain hypothetical, based on the results presented herein, coal may be considered a “pseudo-amphoteric” exchanger that has the capability of removing both cations and anions simultaneously and effectively.

5. Conclusions

In this study, we have demonstrated that TOC, TSS, and especially TDS can be removed simultaneously from produced water using Power River Basin subbituminous coal as the treatment material. The material is stable with repetitive filtration-regeneration cycles. More importantly, the coal was shown to have a surprisingly high ion removal capability for produced water containing extremely high dissolved solids (>150,000 mg/L or 15%). We propose that the PRB coal is a “pseudo-amphoteric” ion exchange material that could simultaneously remove both positive and negative ions. The analyses strongly support the hypothesis of ion exchange as the mechanism for cation removal whereas the mechanism for anion removal is proposed to be by adsorption through resonance structures induced by delocalization of electrons within coal molecules or through ion- π interactions with aromatic clusters. Further work is needed to confirm the anion removal mechanisms. These results may have important ramifications in the reclamation of produced water from energy production sector.

References

- Belbase S, Urynowicz MA, Vance GF, Dangi MB (2013) Passive remediation of coalbed natural gas co-produced water using zeolite. *J Environ Manage* 131:318-324. <https://doi.org/10.1016/j.jenvman.2013.09.044>
- Bell EA, Poynor TE, Newhart KB, Regnery J, Coday BD, Cath TY (2017) Produced water treatment using forward osmosis membranes: Evaluation of extended-time performance and fouling. *J Membr Sci* 525:77-88. <https://doi.org/10.1016/j.memsci.2016.10.032>
- Dewick PM (2006) *Essentials of organic chemistry: for students of pharmacy, medicinal chemistry and biological chemistry*. John Wiley & Sons
- Dickhout JM, Moreno J, Biesheuvel P, Boels L, Lammertink RG, de Vos WM (2017) Produced water treatment by membranes: A review from a colloidal perspective. *J Colloid Interface Sci* 487:523-534. <https://doi.org/10.1016/j.memsci.2016.10.032>
- Dougherty DA (1996) Cation-pi interactions in chemistry and biology: a new view of benzene, Phe, Tyr, and Trp. *Science* 271:163-168. DOI: 10.1126/science.271.5246.163
- Duraisamy RT, Beni AH, Henni A (2013) State of the art treatment of produced water. *Water Treatment*. IntechOpen
- Fakhru'l-Razi A, Pendashteh A, Abdullah LC, Biak DRA, Madaeni SS, Abidin ZZ (2009) Review of technologies for oil and gas produced water treatment. *J Hazard Mater* 170:530-551. <https://doi.org/10.1016/j.jhazmat.2009.05.044>
- Falbe J, Ahland E, Baron G (1982) *Chemical feedstocks from coal*
- Hoekstra AY (2014) Water scarcity challenges to business. *Nat Clim Chang* 4:318. <https://doi.org/10.1038/nclimate2214>
- Hofrichter M, Fakoussa R (2001) Microbial degradation and modification of coal. *Biopolymers*

1:393-429.

Huang Z, Fan M, Tian H (2020) Rare earth elements of fly ash from Wyoming's Powder River Basin coal. *J Rare Earths* 38:219-226. <https://doi.org/10.1016/j.jre.2019.05.004>

Huang Z, Sednek C, Urynowicz MA, Guo H, Wang Q, Fallgren P, Jin S, Jin Y, Igwe U, Li S (2017) Low carbon renewable natural gas production from coalbeds and implications for carbon capture and storage. *Nat Commun* 8:568. <https://doi.org/10.1038/s41467-017-00611-7>

Igunnu ET, Chen GZ (2014) Produced water treatment technologies. *Int J Low Carbon Technol* 9:157-177. <https://doi.org/10.1093/ijlct/cts049>

Jedidi I, Saïdi S, Khemakhem S, Larbot A, Elloumi-Ammar N, Fourati A, Charfi A, Salah AB, Amar RB (2009) Elaboration of new ceramic microfiltration membranes from mineral coal fly ash applied to waste water treatment. *J Hazard Mater* 172:152-158. <https://doi.org/10.1016/j.jhazmat.2009.06.151>

Jiménez S, Micó M, Arnaldos M, Medina F, Contreras S (2018) State of the art of produced water treatment. *Chemosphere* 192:186-208. <https://doi.org/10.1016/j.chemosphere.2017.10.139>

Kim GD, Toy L, Hendren Z, Choi YC, Lesemann M, Buisson H (2017) Oil-Field Produced Water Treatment Using Integrated Forward Osmosis and Membrane Distillation Process. *Proc Water Environ Fed* 2017:5297-5305.

Kim H-S, Nishiyama Y, Ideta K, Miyawaki J, Matsushita Y, Park J-I, Mochida I, Yoon S-H (2013) Analysis of water in Loy Yang brown coal using solid-state ¹H NMR. *J Ind Eng Chem* 19:1673-1679. <https://doi.org/10.1016/j.jiec.2013.02.005>

Kusworo TD, Aryanti N, Utomo DP (2018) Oilfield produced water treatment to clean water using integrated activated carbon-bentonite adsorbent and double stages membrane process. *Chem Eng J* 347:462-471. <https://doi.org/10.1016/j.cej.2018.04.136>

- Lewińska-Preis L, Szram E, Fabiańska MJ, Nádudvari Á, Misz-Kennan M, Abramowicz A, Kruszewski Ł, Kita A (2021) Selected ions and major and trace elements as contaminants in coal-waste dump water from the Lower and Upper Silesian Coal Basins (Poland). *Int J Coal Sci*:1-25. <https://doi.org/10.1007/s40789-021-00421-9>
- Li G, Guo S, Li F (2010) Treatment of oilfield produced water by anaerobic process coupled with micro-electrolysis. *J Environ Sci* 22:1875-1882. [https://doi.org/10.1016/S1001-0742\(09\)60333-8](https://doi.org/10.1016/S1001-0742(09)60333-8)
- Li L, Whitworth TM, Lee R (2003) Separation of inorganic solutes from oil-field produced water using a compacted bentonite membrane. *J Membr Sci* 217:215-225. [https://doi.org/10.1016/S0376-7388\(03\)00138-8](https://doi.org/10.1016/S0376-7388(03)00138-8)
- Li X, Zhu X-q, Okuda K, Zhang Z, Ashida R, Yao H, Miura K (2017) Preparation of carbon fibers from low-molecular-weight compounds obtained from low-rank coal and biomass by solvent extraction. *New Carbon Mater* 32:41-47. [https://doi.org/10.1016/S1872-5805\(17\)60106-9](https://doi.org/10.1016/S1872-5805(17)60106-9)
- Liu F-J, Gasem KA, Tang M, Goroncy A, He X, Huang Z, Sun K, Fan M (2018) Mild degradation of Powder River Basin sub-bituminous coal in environmentally benign supercritical CO₂-ethanol system to produce valuable high-yield liquid tar. *Appl Energy* 225:460-470. <https://doi.org/10.1016/j.apenergy.2018.05.048>
- Liu F-J, Wei X-Y, Fan M, Zong Z-M (2016) Separation and structural characterization of the value-added chemicals from mild degradation of lignites: A review. *Appl Energy* 170:415-436. <https://doi.org/10.1016/j.apenergy.2016.02.131>
- Liu F-J, Wei X-Y, Zhu Y, Gui J, Wang Y-G, Fan X, Zhao Y-P, Zong Z-M, Zhao W (2013) Investigation on structural features of Shengli lignite through oxidation under mild conditions. *Fuel* 109:316-324. <https://doi.org/10.1016/j.fuel.2013.01.020>
- Liu F-J, Zong Z-M, Zhu Y, Wei X-Y, Zhu X-N, Tang M-C, Huang Z (2019) Production of

benzenecarboxylic acids from two typical Chinese subbituminous coals by oxidation in aqueous sodium hypochlorite solution and insights into structural characteristics. *Fuel* 247:386-394.

<https://doi.org/10.1016/j.fuel.2019.01.037>

Ma JC, Dougherty DA (1997) The cation- π interaction. *Chem Rev* 97:1303-1324.

<https://doi.org/10.1021/cr9603744>

Mathews JP, Chaffee AL (2012) The molecular representations of coal—a review. *Fuel* 96:1-14.

<https://doi.org/10.1016/j.fuel.2011.11.025>

Mekonnen MM, Hoekstra AY (2016) Four billion people facing severe water scarcity. *Sci Adv* 2:e1500323. DOI: 10.1126/sciadv.1500323

Munirasu S, Haija MA, Banat F (2016) Use of membrane technology for oil field and refinery produced water treatment—A review. *Process Saf Environ Prot* 100:183-202.

<https://doi.org/10.1016/j.psep.2016.01.010>

Nachod FC (2012) Ion exchange: theory and application. Elsevier

Nasiri M, Jafari I, Parniankhoy B (2017) Oil and gas produced water management: A review of treatment technologies, challenges, and opportunities. *Chem Eng Commun* 204:990-1005.

<https://doi.org/10.1080/00986445.2017.1330747>

Otal E, Vilches LF, Moreno N, Querol X, Vale J, Fernández-Pereira C (2005) Application of zeolitised coal fly ashes to the depuration of liquid wastes. *Fuel* 84:1440-1446.

<https://doi.org/10.1016/j.fuel.2004.08.030>

Oza P, Chaudhuri M (1975) Removal of viruses from water by sorption on coal. *Water Res* 9:707-712. [https://doi.org/10.1016/0043-1354\(75\)90061-5](https://doi.org/10.1016/0043-1354(75)90061-5)

Qi J, Lv J, Bian W, Li J, Liu S (2021) Experimental study on the membrane distillation of highly mineralized mine water. *Int J Coal Sci*:1-9. <https://doi.org/10.1007/s40789-021-00432-6>

Querol X, Moreno N, Umaña Jt, Alastuey A, Hernández E, Lopez-Soler A, Plana F (2002) Synthesis of zeolites from coal fly ash: an overview. *Int J Coal Geol* 50:413-423. [https://doi.org/10.1016/S0166-5162\(02\)00124-6](https://doi.org/10.1016/S0166-5162(02)00124-6)

Quiñonero D, Garau C, Rotger C, Frontera A, Ballester P, Costa A, Deyà PM (2004) Anion- π Interactions: Do They Exist? *Angew Chem Int Ed* 43:141-141. [https://doi.org/10.1002/1521-3757\(20020916\)114:18<3539::AID-ANGE3539>3.0.CO;2-M](https://doi.org/10.1002/1521-3757(20020916)114:18<3539::AID-ANGE3539>3.0.CO;2-M)

Ranck JM, Bowman RS, Weeber JL, Katz LE, Sullivan EJ (2005) BTEX removal from produced water using surfactant-modified zeolite. *J Environ Eng* 131:434-442. [https://doi.org/10.1061/\(ASCE\)0733-9372\(2005\)131:3\(434\)](https://doi.org/10.1061/(ASCE)0733-9372(2005)131:3(434))

Rosa N, Widayati S, Monika I (2017) Coal Utilization In The Making Of Activated Carbon For Adsorbed Natural Gas.

Schottel BL, Chifotides HT, Dunbar KR (2008) Anion- π interactions. *Chem Soc Rev* 37:68-83.

Shahrudin MZ, Othman NH, Alias NH, Ghani SNA (2015) Desalination of produced water using bentonite as pre-treatment and membrane separation as main treatment. *Procedia Soc Behav Sci* 195:2094-2100. <https://doi.org/10.1016/j.sbspro.2015.06.237>

Smith KL, Smoot LD, Fletcher TH, Pugmire RJ (2013) The structure and reaction processes of coal. Springer Science & Business Media

Solomon PR, Carangelo RM (1982) FTIR analysis of coal. 1. Techniques and determination of hydroxyl concentrations. *Fuel* 61:663-669. [https://doi.org/10.1016/0016-2361\(82\)90014-X](https://doi.org/10.1016/0016-2361(82)90014-X)

Song C, Wang T, Pan Y, Qiu J (2006) Preparation of coal-based microfiltration carbon membrane and application in oily wastewater treatment. *Sep Purif Technol* 51:80-84. <https://doi.org/10.1016/j.seppur.2005.12.026>

Stoll ZA, Forrestal C, Ren ZJ, Xu P (2015) Shale gas produced water treatment using innovative

microbial capacitive desalination cell. J Hazard Mater 283:847-855.

<https://doi.org/10.1016/j.jhazmat.2014.10.015>

Sun Y, Wang X, Feng T, Yu G, Wang F (2014) Evaluation of coal extraction with supercritical carbon dioxide/1-methyl-2-pyrrolidone mixed solvent. Energy Fuels 28:816-824.

<https://doi.org/10.1021/ef401682g>

Vengosh A, Jackson RB, Warner N, Darrah TH, Kondash A (2014) A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. Environ Sci Technol 48:8334-8348. <https://doi.org/10.1021/es405118y>

Wang Q, Guo H, Wang H, Urynowicz MA, Hu A, Yu C-P, Fallgren P, Jin S, Zheng H, Zeng RJ (2019) Enhanced production of secondary biogenic coalbed natural gas from a subbituminous coal treated by hydrogen peroxide and its geochemical and microbiological analyses. Fuel 236:1345-1355. <https://doi.org/10.1016/j.fuel.2018.09.114>

Wang Y-G, Wei X-Y, Xie R-L, Liu F-J, Li P, Zong Z-M (2015) Structural Characterization of Typical Organic Species in Jincheng

No. 15 Anthracite. Energy Fuels 29:595-601. <https://doi.org/10.1021/ef502373p>

Woo YC, Chen Y, Tijing LD, Phuntsho S, He T, Choi J-S, Kim S-H, Shon HK (2017) CF₄ plasma-modified omniphobic electrospun nanofiber membrane for produced water brine treatment by membrane distillation. J Membr Sci 529:234-242. <https://doi.org/10.1016/j.memsci.2017.01.063>

Xie K (2015) Structure and Reactivity of Coal A Survey of Selected Chinese Coals. Springer-Verlag, Berlin Heidelberg

Xu B, Cao Q, Kuang D, Gasem KA, Adidharma H, Ding D, Fan M (2020) Kinetics and mechanism of CO₂ gasification of coal catalyzed by Na₂CO₃, FeCO₃ and Na₂CO₃-FeCO₃. J Energy Inst 93:922-933. <https://doi.org/10.1016/j.joei.2019.08.004>

Xu B, Kuang D, Liu F, Lu W, Goroncy AK, He T, Gasem K, Fan M (2018) Characterization of Powder River Basin coal pyrolysis with cost-effective and environmentally-friendly composite NaFe catalysts in a thermogravimetric analyzer and a fixed-bed reactor. *Int J Hydrog Energy* 43:e6935. <https://doi.org/10.1016/j.ijhydene.2018.02.102>

Zhang K, Li H, Han J, Jiang B, Gao J (2021) Understanding of mineral change mechanisms in coal mine groundwater reservoir and their influences on effluent water quality: a experimental study. *Int J Coal Sci* 8:154-167. <https://doi.org/10.1007/s40789-020-00368-3>

Zhao H, Vance GF, Ganjegunte GK, Urynowicz MA (2008) Use of zeolites for treating natural gas co-produced waters in Wyoming, USA. *Desalination* 228:263-276. <https://doi.org/10.1016/j.desal.2007.08.014>

Zhao H, Vance GF, Urynowicz MA, Gregory RW (2009) Integrated treatment process using a natural Wyoming clinoptilolite for remediating produced waters from coalbed natural gas operations. *Appl Clay Sci* 42:379-385. <https://doi.org/10.1016/j.clay.2008.03.007>

List of figures

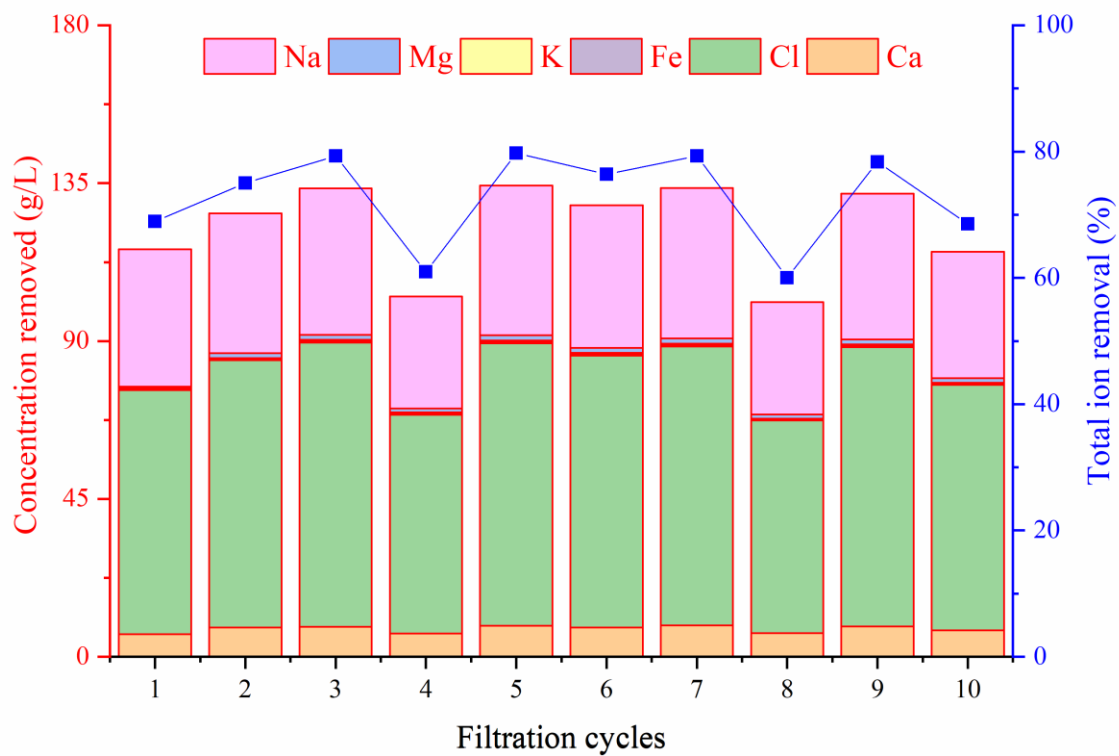


Fig. 1 Inorganic ions removed by filtering 30-mL of produced water through 30-g of coal. Cycles 2-10 were conducted with washed (regenerated) coal as described in the text. The raw produced water had TDS of 152 g/L.

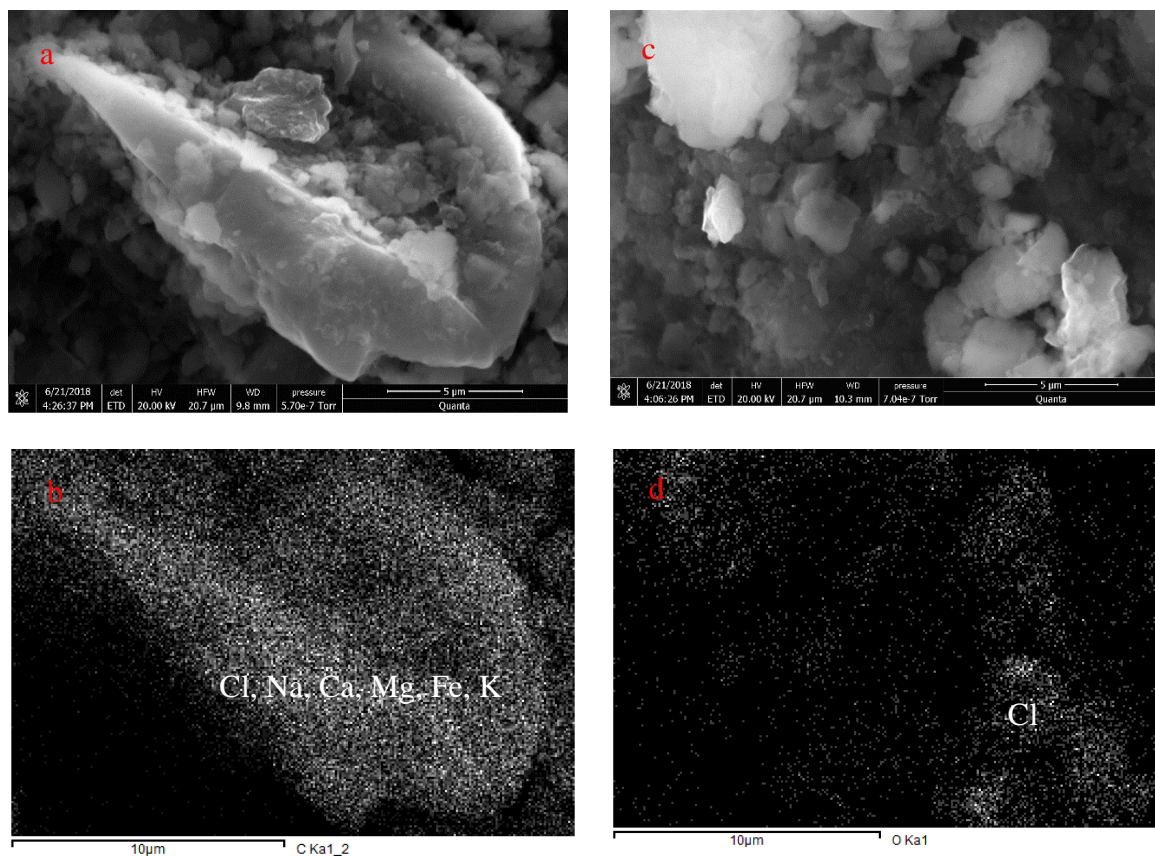


Fig. 2 SEM & EDS images of the coal samples. (a) SEM of coal directly after filtration; (b) EDS of coal directly after filtration; (c) SEM of coal after regeneration with acid wash; (d) EDS of coal after regeneration with acid wash.

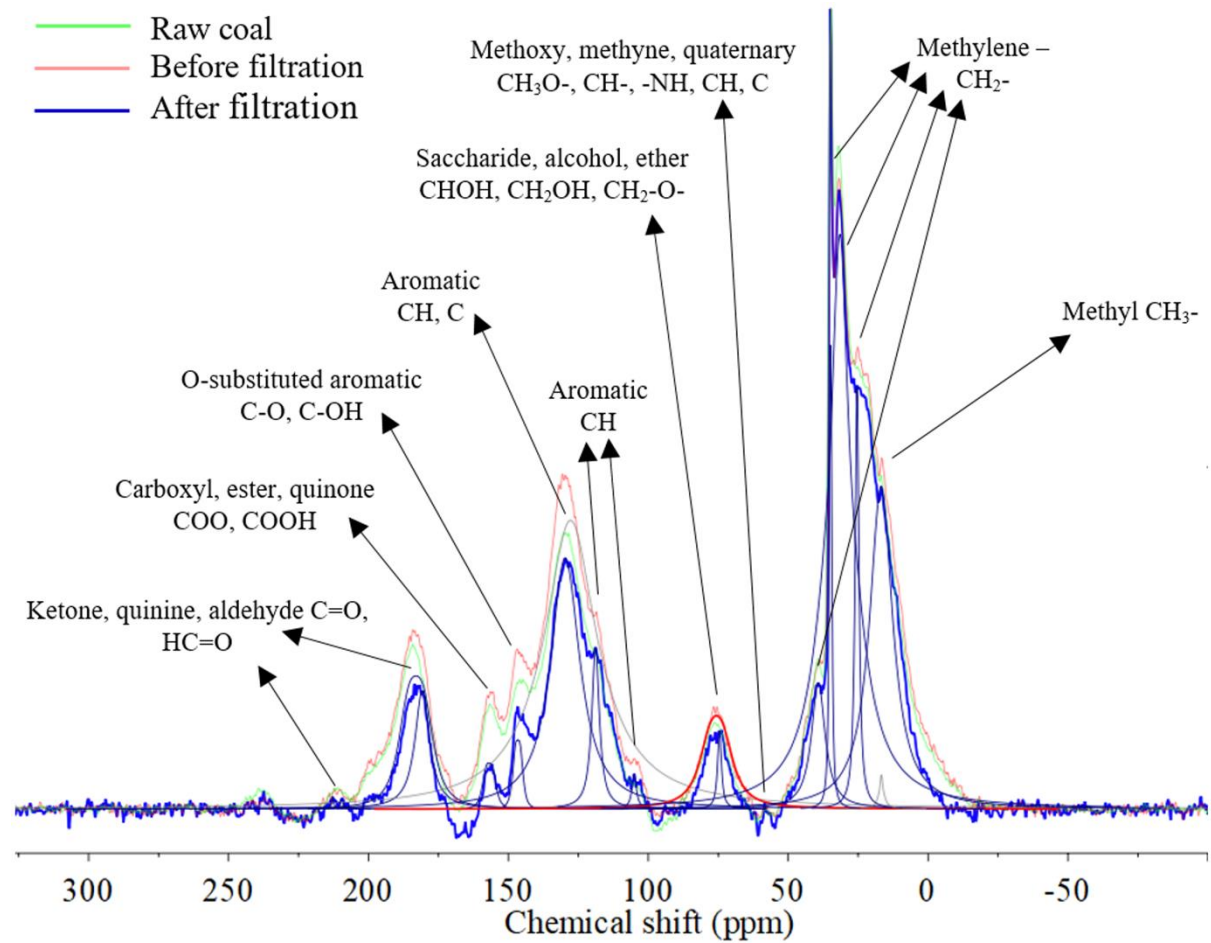


Fig. 3 ^{13}C NMR analysis of raw coal, washed coal before filtration of produced water and coal after filtration of produced water.

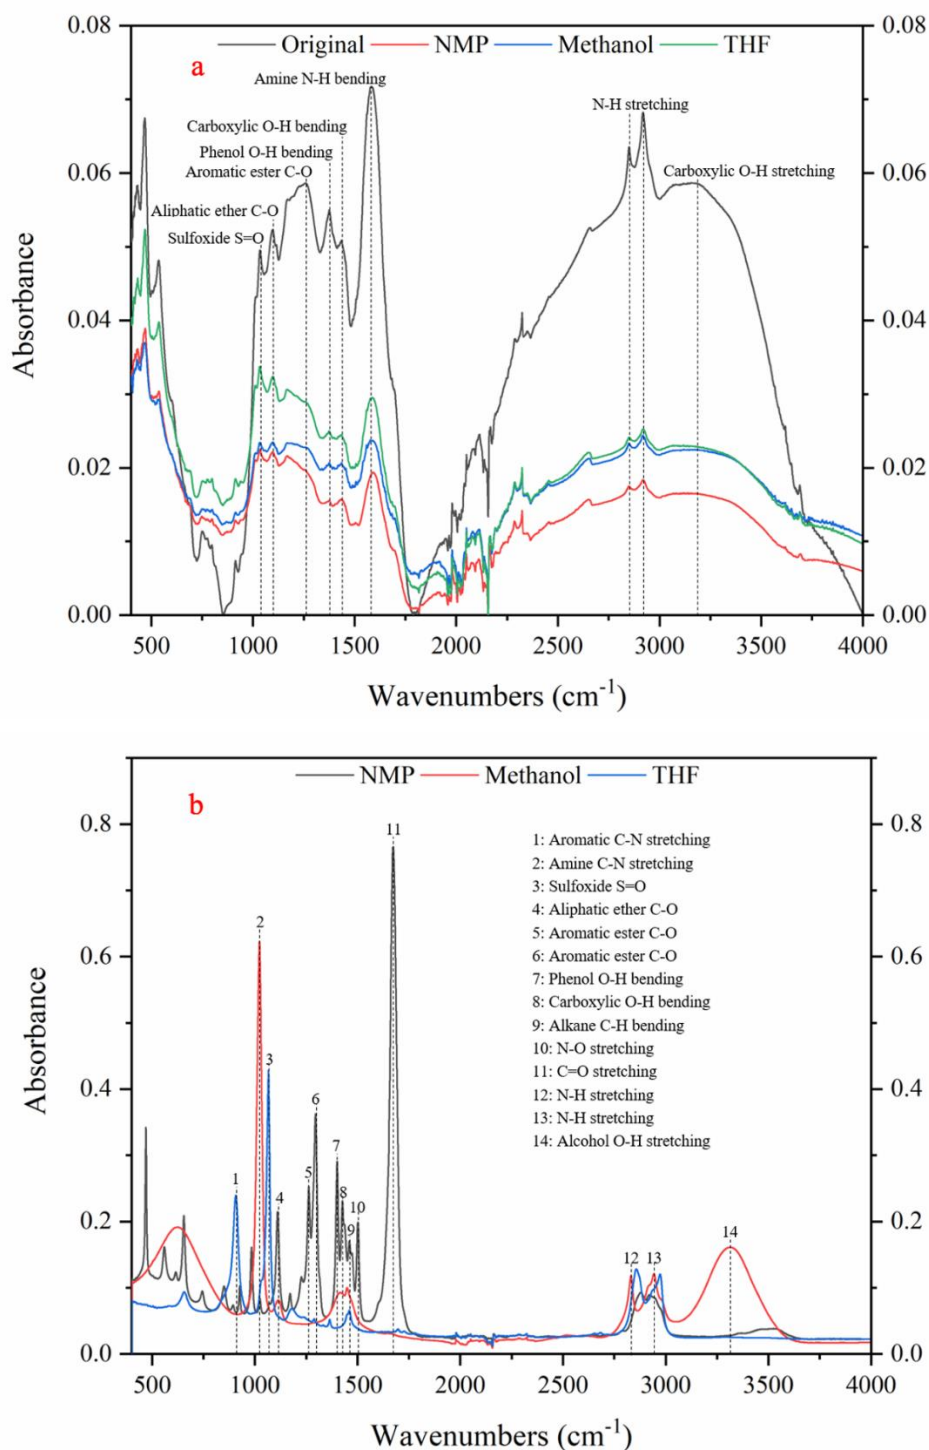


Fig. 4 FTIR spectra of solvent-extracted coal: (a) Solid Coal (Original was coal prior to solvent extraction, NMP, Methanol and THF were extracted coal); (b) Liquid solvents after extraction.

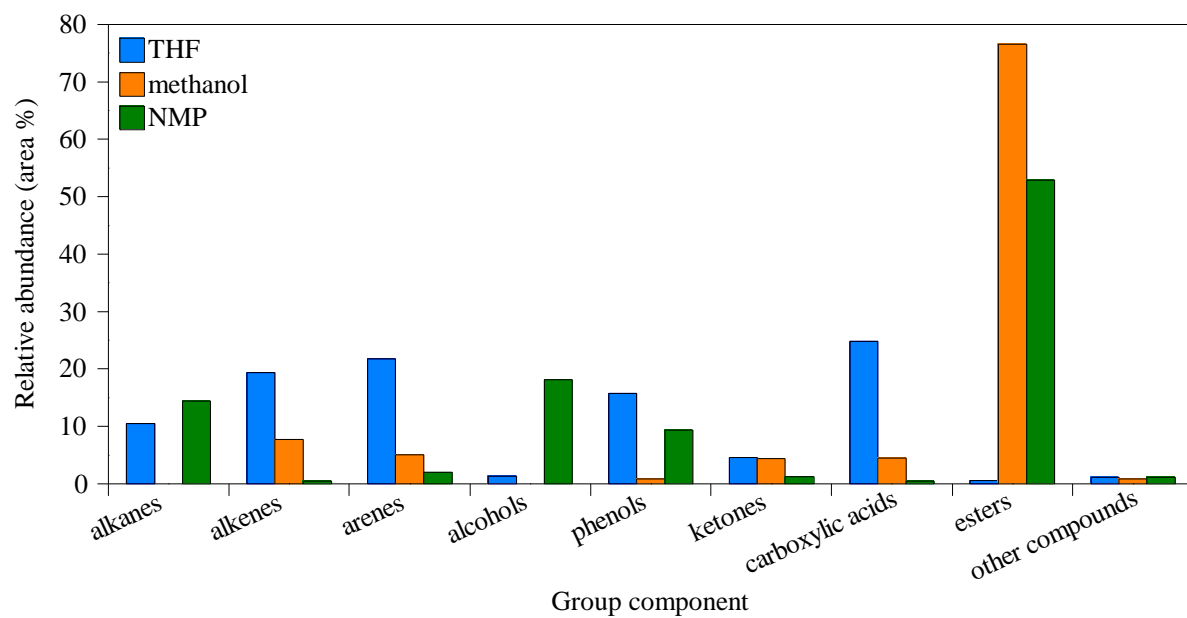


Fig. 5 GC/MS detectable constituents (by group component) in the coal extracts

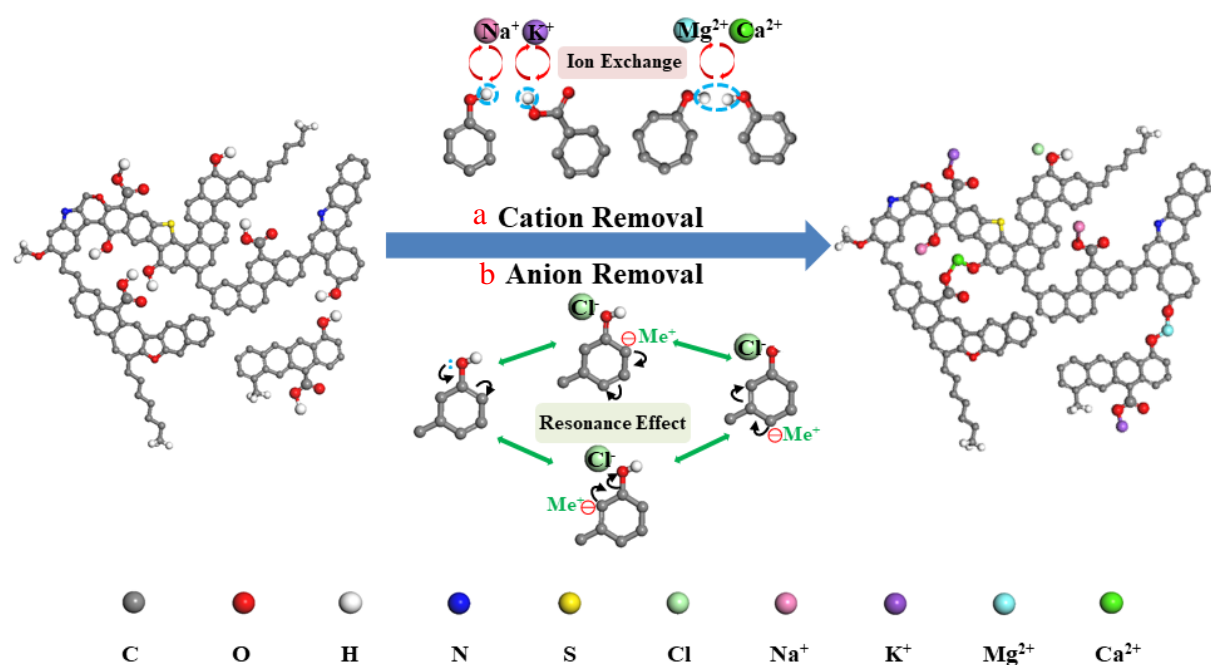


Fig. 6 Proposed mechanism of inorganic ions removal. (a) Cation exchange; (b) Resonance effect.

The cations (monovalent and divalent) were removed by ion exchange with H-bearing moieties (-OH, COOH, etc.). Both cations and anions are proposed to be removed by non-ionized charges induced by resonance effect.

Project Impact

The proposed project has been focused on investigation of the research has been focused on removal of organic and inorganic materials in waters discharged by energy industry. The produced waters contain extremely high chemical oxygen demand (COD) and total organic carbon (TOC). Conventional technologies used for removal of the contaminants are not only expensive but also generate secondary pollutions. Transformative technologies are needed in this R&D area. This project is designed to overcome the challenges.

Economic and environmental impacts:

Energy is the backbone of economic development. Before affordable renewable energies become widely available, fossil fuel-based energies will still dominate our lives due to their advantages, although their disadvantages are obvious also and among them is the generation of large amount of water with high concentrations of pollutants. The success in the treatment of the produced waters will not only be beneficial to environmental quality but also economy because the water treatment technology can help employment.